


SOL-IQbox-mini-B

SKU: 226951

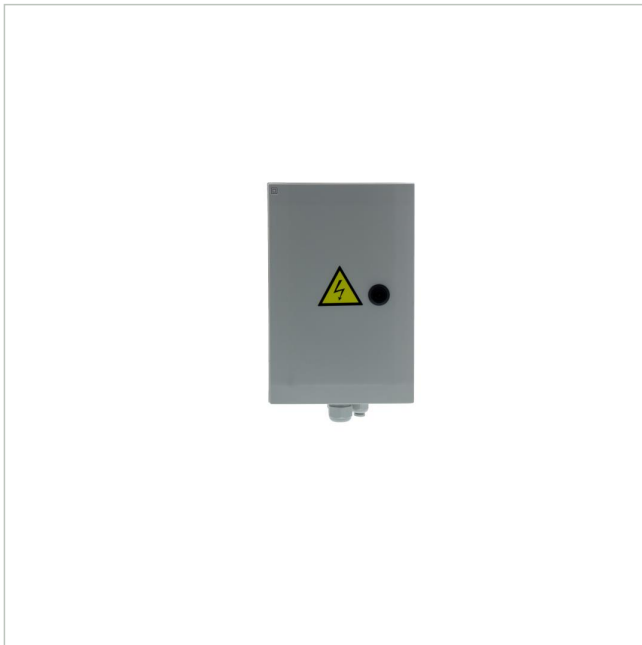

camera connection box for video security application, 300x200x150mm

Main Features

Optimised for outdoor use

Electrically prewired for flexible, modular expansion.

UV stable polycarbonate, corrosion-resistant

Protective class IP66,

Impact resistance IK 10, vandalism protected

Including electrical circuit breaker 1-pole 6kA

Swivelling door

Wall or mast mounted

Fast, easy installation

Simple mechanical finishing

Specifications

Series	Solvido IQbox
Housing	Outdoor
Color (housing)	RAL7035
Housing material	Polycarbonate
Heater	no
Dimension (lxwxh)	300x200x150mm
Supply voltage	230VAC
Operating temperature	-40°C ~ +70°C
Certifications	IK10
Protection rating	IP66
Manufacturer order number	226951

SOL-IQbox-mini-B

Optional Accessory

SKU	Name	Description
210300	MDR-100-12	Netzteil 12VDC / 7,5A für Hutschienenmontage TS-35
209004	MDR-100-48	Netzteil 48V / 2A für Hutschienenmontage TS-35
211055	MDR-60-12	Netzteil 12VDC / 5A für Hutschienenmontage TS-35
211056	MDR-60-48	Netzteil 48VDC / 1,25A für Hutschienenmontage TS-35
212371	SOL-WST-MB-20	Mastbefestigung 20cm für SOL-IQbox-mini, Set (2St)
220468	SOL-WST-SH/1	Swivelling lever for profile half-cylinder (1pc.) delivery without lock cylinder
220068	SOL-WST-SSK/1	Lock with toggle lock (1 piece) with key, for CUS-WST and SOL-IQbox series
209743	SOL-WST-WB	Wall mounting for CUS-WST and SOL-IQbox series set (4pcs) wall clearance 10mm

Your contact person

VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark
Germany

