




IND-32F0016P0A

SKU: 236318

EAN: 4260229840573

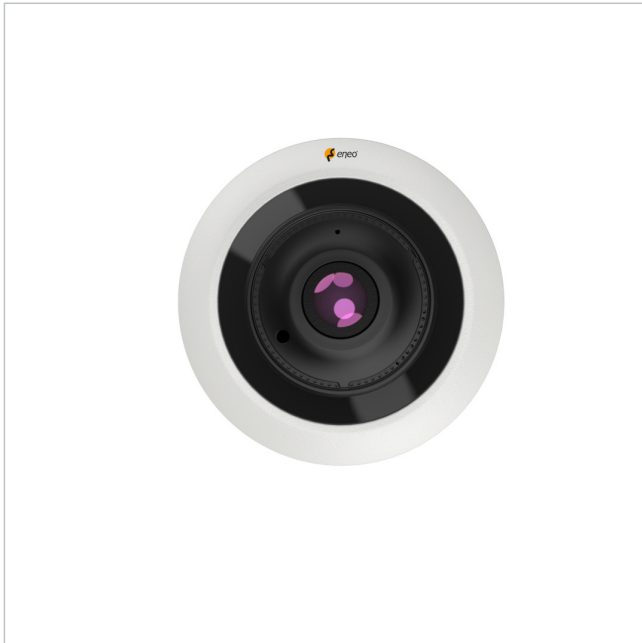

Network Dome Fix, 360° 4000x3000, Day/Night, DWDR, 1,6mm, IR, 12VDC, PoE, IP66

Main Features

1/2.3" Omnivision CMOS sensor

1.6mm fixed focal length FishEye lens

360° panoramic, quad, panomorphic view, ceiling, wall

Integration with eneo INsight software & App

Day/night function, 3D-DNR, slow speed shutter

Resolution max. 4000x3000@15fps

Smart Codec H.265/H.264, Multi-Streaming

Triple stream (main, sub, mobile)

Browser independent (Edge, Safari, Firefox, Chrome)

IR-LED illumination, microphone and loudspeaker integrated

NDA compliance

For indoor and outdoor use, IP66

Specifications

| | |
|---------------------|--|
| EAN/GTIN | 4260229840573 |
| Dimensions (HxWxD) | 55x120mm |
| Series | eneo IN-Series |
| Camera Type | Fisheye Kamera |
| Resolution Standard | 12 Megapixel |
| System | True Day&Night |
| Sensor size | 1/2,3" |
| Imager | CMOS |
| Video compression | H.264, H.264+ (Smart Stream), H.265, H.265+ (Smart Stream), M-JPEG |

IND-32F0016P0A

Continuation of the specifications

| | |
|-------------------------------|--|
| Image resolution max. | 4000x3000 |
| Image Transmission Rate | 15 fps |
| Day&Night switch | ICR |
| Sensitivity | 0,01 Lux at F1,6 |
| Digital Noise Reduction | yes |
| Lens Type | fixed focal length |
| Focal Length | 1,6 mm |
| Iris Control | DC |
| Digital Zoom | yes |
| Observe (62 px/m) | 9,8 m |
| Recognize (125 px/m) | 4 m |
| Identify (250 px/m) | 1,8 m |
| Detect (25px/m) | 27 m |
| Horizontal Angle of View | 360° |
| Vertical Angle of View | 180° |
| MOD (Minimum Object Distance) | 0,5 m |
| Illumination | Infrared |
| Housing | Outdoor |
| Color (housing) | Pantone P 179-1, RAL9003 |
| Housing material | Metal, Plastic |
| Heater | no |
| Blower | no |
| Alarm inputs | 1 |
| Alarm outputs | 1 |
| Audio support | yes |
| Ethernet interface | 100Base-TX, 10Base-T |
| Serial interfaces | Ethernet |
| Internal storage | microSD-Kartenslot |
| Analysis functions | no |
| Mounting | Ceiling mount, Wall mount |
| Supply voltage | 12VDC, PoE |
| Power consumption | approx. 9W |
| Power over Ethernet | IEEE 802.3af |
| Vandal proof | no |
| Operating temperature | -35°C ~ +60°C, @ Humidity 90% or less (non-condensing) |
| ONVIF | ONVIF Profile G, ONVIF Profile S, ONVIF Profile T |
| Protection rating | IP66 |
| Low Speed Shutter | yes |
| Backlight Compensation | BLC, HLC |
| Wide Dynamic Range (WDR) | D-WDR |
| Motion Detector | no |

IND-32F0016P0A

Continuation of the specifications

| | |
|---------------------------|--|
| Camera type | Dome |
| Audio | 93±3dB max., built-in loudspeaker, built-in microphone |
| Remote configuration | Browser |
| Illumination range | approx. 10m |
| Weight | 400g |
| Manufacturer order number | 236318 |

Optional Accessory

| SKU | Name | Description |
|--------|-------------------|---|
| 236323 | AK-27 | Camera connection box Fisheye for ceiling tube DOME-CH6 and wall mount DOME-WB6, Indoor |
| 236325 | AK-28 | Camera connection box for wall and ceiling mount, for Fisheye IND-32F0016P0A, Indoor |
| 234756 | DOME-CH6 | Ceiling pipe for junction box AK-23 and AK-25, Length approx. 294mm |
| 234755 | DOME-WB6 | Wall bracket for Connection box AK-23 and AK-25 |
| 218218 | eneo Site Manager | Management Software for eneo IP products |

Optional Services

| SKU | Name | Description |
|--------|----------------------------|--|
| 229234 | Vorkonfiguration IP-Kamera | Preconfiguration 1x IP camera Function test, FW update |

Your contact person

VIDEOR E. Hartig GmbH
 Carl-Zeiss-Straße 8
 63322 Rödermark
 Germany

