




# IND-32F0016P0A

SKU: 236318

EAN: 4260229840573

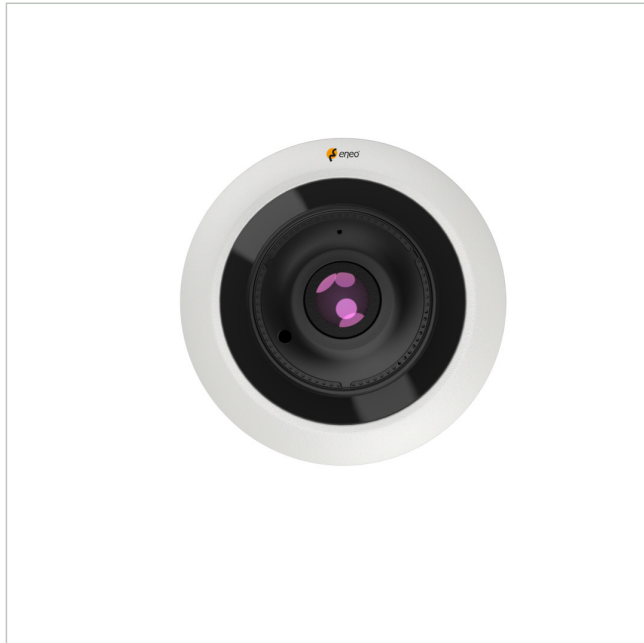

Network Dome Fix, 360° 4000x3000, Day/Night, DWDR, 1,6mm, IR, 12VDC, PoE, IP66

## Main Features

1/2.3" Omnivision CMOS sensor

1.6mm fixed focal length FishEye lens

360° panoramic, quad, panomorphic view, ceiling, wall

Integration with eneo INsight software & App

Day/night function, 3D-DNR, slow speed shutter

Resolution max. 4000x3000@15fps

Smart Codec H.265/H.264, Multi-Streaming

Triple stream (main, sub, mobile)

Browser independent (Edge, Safari, Firefox, Chrome)

IR-LED illumination, microphone and loudspeaker integrated

NDAA compliance

For indoor and outdoor use, IP66

## Specifications

EAN/GTIN	4260229840573
Dimensions (HxWxD)	55x120mm
Series	eneo IN-Series
Camera Type	Fisheye Kamera
Resolution Standard	12 Megapixel
System	True Day&Night
Sensor size	1/2,3"
Imager	CMOS
Video compression	H.264, H.264+ (Smart Stream), H.265, H.265+ (Smart Stream), M-JPEG

# IND-32F0016P0A

## Continuation of the specifications

Image resolution max.	4000x3000
Image Transmission Rate	15 fps
Day&Night switch	ICR
Sensitivity	0,01 Lux at F1,6
Digital Noise Reduction	yes
Lens Type	fixed focal length
Focal Length	1,6 mm
Iris Control	DC
Digital Zoom	yes
Observe (62 px/m)	9,8 m
Recognize (125 px/m)	4 m
Identify (250 px/m)	1,8 m
Detect (25px/m)	27 m
Horizontal Angle of View	360°
Vertical Angle of View	180°
MOD (Mininum Object Distance)	0,5 m
Illumination	Infrared
Housing	Outdoor
Color (housing)	Pantone P 179-1, RAL9003
Hosuing material	Metal, Plastic
Heater	no
Blower	no
Alarm inputs	1
Alarm outputs	1
Audio support	yes
Ethernet interface	100Base-TX, 10Base-T
Serial interfaces	Ethernet
Internal storage	microSD-Kartenslot
Analysis functions	no
Mounting	Ceiling mount, Wall mount
Supply voltage	12VDC, PoE
Power consumption	approx. 9W
Power over Ethernet	IEEE 802.3af
Vandal proof	no
Operating temperature	-35°C ~ +60°C, @ Humidity 90% or less (non-condensing)
ONVIF	ONVIF Profile G, ONVIF Profile S, ONVIF Profile T
Protection rating	IP66
Low Speed Shutter	yes
Backlight Compensation	BLC, HLC
Wide Dynamic Range (WDR)	D-WDR
Motion Detector	no

# IND-32F0016P0A

Continuation of the specifications

Camera type	Dome
Audio	93±3dB max., built-in loudspeaker, built-in microphone
Remote configuration	Browser
Illumination range	approx. 10m
Weight	400g
Manufacturer order number	236318

## Optional Accessory

SKU	Name	Description
236323	AK-27	Camera connection box Fisheye for ceiling tube DOME-CH6 and wall mount DOME-WB6, Indoor
236325	AK-28	Camera connection box for wall and ceiling mount, for Fisheye IND-32F0016P0A, Indoor
234756	DOME-CH6	Ceiling pipe for junction box AK-23 and AK-25, Length approx. 294mm
234755	DOME-WB6	Wall bracket for Connection box AK-23 and AK-25
218218	eneo Site Manager	Management Software for eneo IP products

## Optional Services

SKU	Name	Description
229234	Vorkonfiguration IP-Kamera	Preconfiguration 1x IP camera Function test, FW update

## Your contact person

VIDEOR E. Hartig GmbH  
 Carl-Zeiss-Straße 8  
 63322 Rödermark  
 Germany

