




INP-72A0018MIA

SKU: 236322

EAN: 4260229840535

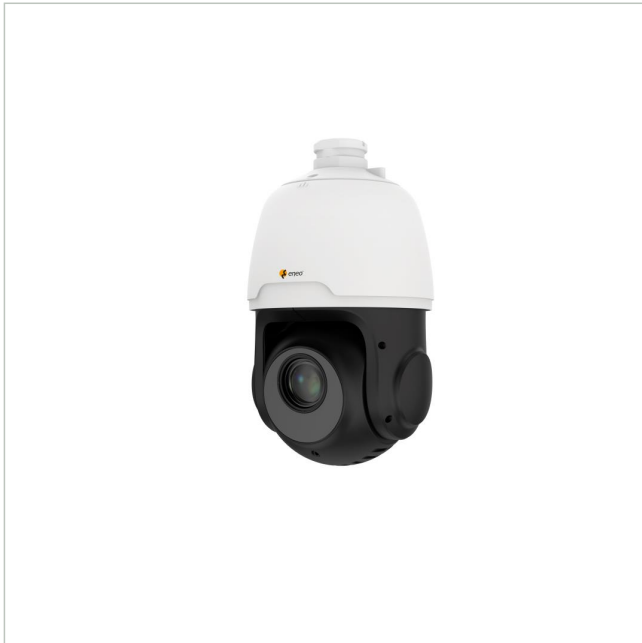

Netzwerk Dome, PTZ, 18x 1920x1080, Day/Night, WDR, AI Alarm, Audio, 12VDC, PoE+, IP6

Main Features

1/2.7" SmartSens CMOS sensor

Maximum resolution 1920x1080 pixels, 30fps

AI analysis functions including object classification

WDR 120dB, 3D-DNR noise reduction

Motorised autofocus zoom lens 18x 5.0-90mm

Smart Codec H.265/H.264, multi-streaming

Browser independent (Edge, Safari, Firefox, Chrome)

Supports ONVIF profiles S/T/G

Local storage via Micro SD card

Audio & alarm input and output

NDAA compliance

IR LED illumination, IP66

Specifications

EAN/GTIN	4260229840535
Dimensions (HxWxD)	270x160mm
Series	eneo IN-Series
Camera Type	Face recognition, License plate recognition, People Count, Retail Intelligence
Resolution Standard	HD 1080p
System	True Day&Night
Sensor size	1/2.7"
Imager	CMOS
Video compression	H.264, H.264+ (Smart Stream), H.265, H.265+ (Smart Stream), M-JPEG

INP-72A0018MIA

Continuation of the specifications

Image resolution max.	1920x1080
Image Transmission Rate	30 fps
Day&Night switch	ICR
Sensitivity	0,0003 Lux at F1,6
Digital Noise Reduction	yes
Lens Type	auto focus zoom
Focal Length	5 - 90 mm
Iris Control	DC
Zoom Factor	18x
Observe (62 px/m)	29,4 - 518,8 m
Recognize (125 px/m)	14,4 - 258 m
Identify (250 px/m)	7,2 - 127 m
Detect (25px/m)	73,9 - 1260 m
Horizontal Angle of View	53,3 - 3,8°
Vertical Angle of View	30,7 - 2,2°
Illumination	Infrared
Housing	Outdoor
Color (housing)	black, Pantone P 179-1, RAL9003
Hosuing material	Aluminium
Heater	no
Blower	no
Rotation range	360°
Speed (manual)	80°/Sek.
Speed (preset)	120°/Sek.
Alarm inputs	1
Alarm outputs	1
Audio support	yes
Ethernet interface	100Base-TX, 10Base-T
Serial interfaces	Ethernet
Internal storage	microSD-Kartenslot
Analysis functions	Attribute Detection (AD), Cross Counting (CC), Crowd Density Detection (CD), Face Attendance (FA), Face Detection (FD), Face Recognition (FR), Heat Map (HM), Human&Vehicle Detection (PD&VD), License Plate Detection (LPD), License Plate Recognition (LPR), Line Crossing Detection (LCD), Perimeter Intrusion Detection (PID), Queue Length Detection (QD), Rare Sound Detection (RSD), Stationary Object Detection (SOD)
Mounting	Wall mount
Supply voltage	12VDC, PoE+
Power consumption	22W
Power over Ethernet	IEEE 802.3at

INP-72A0018MIA

Continuation of the specifications

Vandal proof	no
Operating temperature	-30°C ~ +60°C, @ Humidity 90% or less (non-condensing)
ONVIF	ONVIF Profile G, ONVIF Profile S, ONVIF Profile T
Protection rating	IP66
Low Speed Shutter	yes
Backlight Compensation	BLC, HLC
Wide Dynamic Range (WDR)	WDR 120dB
Motion Detector	yes
Camera type	PTZ
Audio	1/1 Line input and output, 2 Way Audio
Remote configuration	Browser
Illumination range	approx. 100m
Weight	2.5kg
Manufacturer order number	236322

Optional Accessory

SKU	Name	Description
235562	CM-22	Corner mounting adapter for wall bracket WB-24 and PTZ dome camera INP-75A0033MIA
236198	eneo INsight Installation Tool	Supports adjustments for cameras with AI features for IN-series
218218	eneo Site Manager	Management Software for eneo IP products
239837	KBD-3NET	Network keyboard with joystick, supports ONVIF protocol, RJ45, 12VDC
235257	PM-21	Pole mounting adapter for camera connection box AK-20 and AK-21

Optional Services

SKU	Name	Description
229234	Vorkonfiguration IP-Kamera	Preconfiguration 1x IP camera Function test, FW update

INP-72A0018MIA

Your contact person

VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark
Germany

