




INM-78M2812M0A

SKU: 236668

EAN: 4260229840627

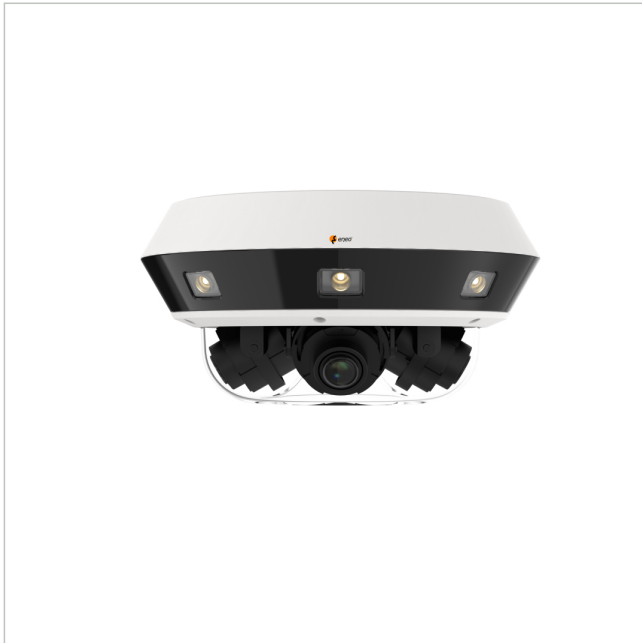

Network Multisensor camera, 4x 3840x2160, Day&Night, 2,8-12mm IR, White light, WDR, IK10, IP67

Main Features

- Multidirectional camera 4x 1/1.8" CMOS
- Max. Resolution 3840 x 2160, frame rate 25fps
- Lenses with motorised focal length 2.8-12mm
- AI analysis functions including object classification
- Smart codec H.265/H.264, multi-streaming
- Browser-independent (Edge, Safari, Firefox, Chrome)

- Supports T-WDR, BLC, HLC and 3D DNR
- Supports ONVIF profiles G, S and T
- Integrated IR and white light illumination
- For outdoor use IP67, vandalism protected IK10
- NDA compliance
- Wall bracket and PoE injector included

Specifications

EAN/GTIN	4260229840627
Dimensions (HxWxD)	146x300mm
Series	eneo IN-Series
Camera Type	Multisensor Camera
Resolution Standard	32 Megapixel
System	electronic Day&Night
Sensor size	1/1.8"
Imager	CMOS
Video compression	H.264, H.264+ (Smart Stream), H.265, H.265+ (Smart Stream), M-JPEG

INM-78M2812M0A

Continuation of the specifications

Image resolution max.	3840x2160
Image Transmission Rate	30 fps
Day&Night switch	ICR
Sensitivity	0,006 Lux bei F1,2
Digital Noise Reduction	yes
Lens Type	Varifocal (motorized)
Focal Length	2,8 - 12 mm
Iris Control	DC
Horizontal Angle of View	48 - 112°
Vertical Angle of View	27 - 58°
Illumination	Infrared, White light
Housing	Outdoor
Color (housing)	Pantone P 179-1, RAL9003
Color (bubble)	clear
Housing material	Aluminium
Heater	yes
Window heater	no
Blower	no
Video outputs	no
Alarm inputs	ja
Alarm outputs	yes
Audio support	yes
Ethernet interface	1000Base-T, 100Base-TX, 10Base-T
Serial interfaces	Ethernet
Internal storage	256GB, microSD card, microSDHC card, microSDXC card
Analysis functions	Cross Counting (CC), Crowd Density Detection (CD), Face Detection (FD), Heat Map (HM), Human&Vehicle Detection (PD&VD), License Plate Recognition (LPR), Line Crossing Detection (LCD), Perimeter Intrusion Detection (PID), Queue Length Detection (QD), Stationary Object Detection (SOD)
Mounting	Wall mount
Supply voltage	12VDC, 24VAC, PoE++
Power consumption	35W @ 24VAC, 40W @ 12VDC, 41W @ PoE
Power over Ethernet	IEEE 802.3bt
Vandal proof	yes
Operating temperature	-30°C ~ +55°C, @ Humidity 95% or less (non-condensing)
ONVIF	ONVIF Profile G, ONVIF Profile S, ONVIF Profile T
Certifications	IK10
Protection rating	IP67
Low Speed Shutter	yes

INM-78M2812M0A

Continuation of the specifications

Backlight Compensation	BLC, HLC
Wide Dynamic Range (WDR)	WDR 120dB
Motion Detector	yes
Camera type	Dome
Frame rate	3840 × 2160)@25/30fps pro Kanal
Remote configuration	Browser
Illumination range	approx. 35m IR, approx.25m White Light
Weight	4.6kg
Network connection	1 x 10/100/1000BASE-T
Manufacturer order number	236668

Optional Accessory

SKU	Name	Description
235562	CM-22	Corner mounting adapter for wall bracket WB-24 and PTZ dome camera INP-75A0033MIA
238984	DOME-CH7	Ceiling mount IN-Series Length approx. 294mm
236198	eneo INsight Installation Tool	Supports adjustments for cameras with AI features for IN-series
218218	eneo Site Manager	Management Software for eneo IP products
239837	KBD-3NET	Network keyboard with joystick, supports ONVIF protocol, RJ45, 12VDC
235257	PM-21	Pole mounting adapter for camera connection box AK-20 and AK-21

Optional Services

SKU	Name	Description
211125	LACKIERUNG Fix-Dome-Kamera	Extra charge for special paint fixed dome in RAL color
229234	Vorkonfiguration IP-Kamera	Preconfiguration 1x IP camera Function test, FW update

INM-78M2812M0A

Your contact person

VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark
Germany

