


SKD02-T Kabel Kit 30 m

SKU: 240912

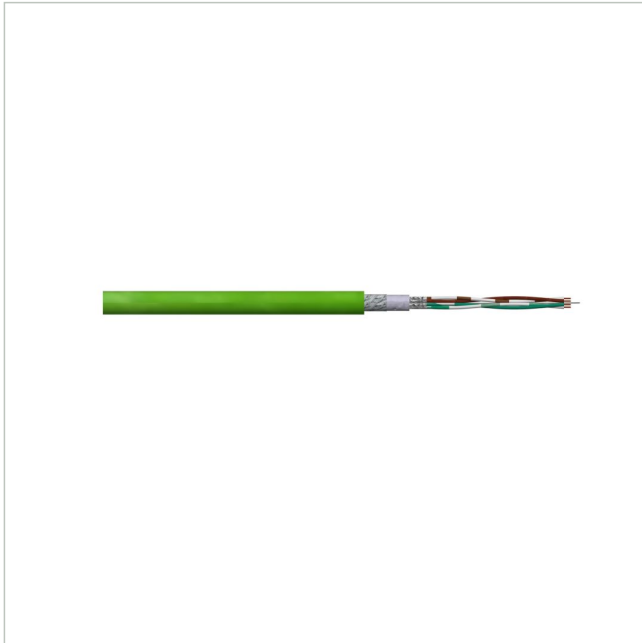

30 meter SKD02-T system cable Digital special cable with Ex approval according to DIN EN 60079-14

Abb. ähnlich

Main Features

30 m length

Meets the requirements for cables in potentially explosive atmosphere according to IEC EN 60079-14 (Cat. 1) and IEC EN 60079-2, 4h at 200°C

Complies with the provisions for cables in potentially explosive atmosphere according to IEC EN 60079-14 (Cat. 1) and IEC EN 60079-2, 4h at 200°C

Tested for -60°C to +80°C fixed installation

Flame retardant according to IEC 60332-1-2

Resistant according to IEC EN 60754-1 (Cat. 1) and IEC EN 60754-2 (Cat. 1)

Meets the requirements for cables in potentially explosive atmosphere according to IEC EN 60079-14 (Cat. 1) and IEC EN 60079-2, 4h at 200°C

IEEE 802.3at PoE+, max 30 W per channel, max 95 m

Resistant to sunlight in accordance with UL 2556 para. 4.2.8.5 (720 h)

Specifications

Series	ExCam
Manufacturer order number	26030406

SKD02-T Kabel Kit 30 m

Your contact person

VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark
Germany

