


SKDP03-T Kabel Kit 30 m

SKU: 240913

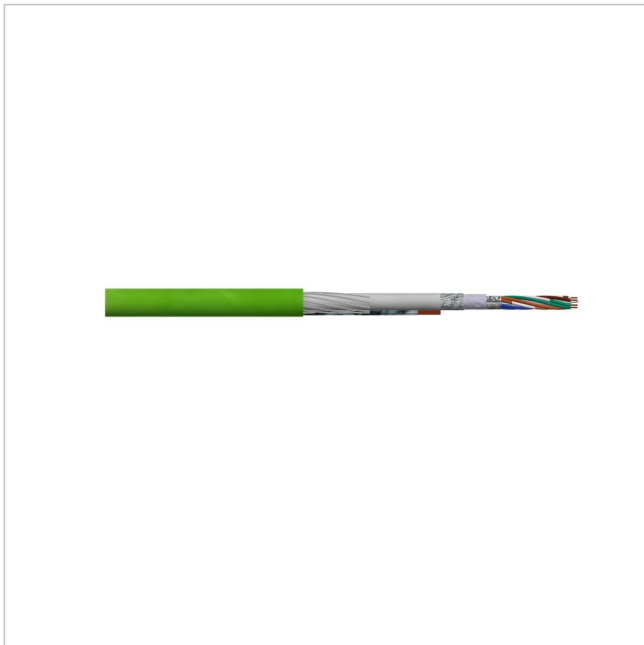

30 meter SKDP03-T system cable Digital special cable with Ex approval according to DIN EN 60079-14

Abb. ähnlich

Main Features

| | |
|---|--|
| 30 m length | Flame retardant according to IEC 60332-1-2 |
| Meets the requirements for cables in potentially explosive atmosphere according to IEC 60079-14 (Cat. 1) and IEC 60079-17 (Cat. 1) and IEC 60079-26 (Cat. 1) and IEC 60079-27 (Cat. 1) and IEC 60079-28 (Cat. 1) and IEC 60079-29 (Cat. 1) and IEC 60079-30 (Cat. 1) and IEC 60079-31 (Cat. 1) and IEC 60079-32 (Cat. 1) and IEC 60079-33 (Cat. 1) and IEC 60079-34 (Cat. 1) and IEC 60079-35 (Cat. 1) and IEC 60079-36 (Cat. 1) and IEC 60079-37 (Cat. 1) and IEC 60079-38 (Cat. 1) and IEC 60079-39 (Cat. 1) and IEC 60079-40 (Cat. 1) and IEC 60079-41 (Cat. 1) and IEC 60079-42 (Cat. 1) and IEC 60079-43 (Cat. 1) and IEC 60079-44 (Cat. 1) and IEC 60079-45 (Cat. 1) and IEC 60079-46 (Cat. 1) and IEC 60079-47 (Cat. 1) and IEC 60079-48 (Cat. 1) and IEC 60079-49 (Cat. 1) and IEC 60079-50 (Cat. 1) and IEC 60079-51 (Cat. 1) and IEC 60079-52 (Cat. 1) and IEC 60079-53 (Cat. 1) and IEC 60079-54 (Cat. 1) and IEC 60079-55 (Cat. 1) and IEC 60079-56 (Cat. 1) and IEC 60079-57 (Cat. 1) and IEC 60079-58 (Cat. 1) and IEC 60079-59 (Cat. 1) and IEC 60079-60 (Cat. 1) and IEC 60079-61 (Cat. 1) and IEC 60079-62 (Cat. 1) and IEC 60079-63 (Cat. 1) and IEC 60079-64 (Cat. 1) and IEC 60079-65 (Cat. 1) and IEC 60079-66 (Cat. 1) and IEC 60079-67 (Cat. 1) and IEC 60079-68 (Cat. 1) and IEC 60079-69 (Cat. 1) and IEC 60079-70 (Cat. 1) and IEC 60079-71 (Cat. 1) and IEC 60079-72 (Cat. 1) and IEC 60079-73 (Cat. 1) and IEC 60079-74 (Cat. 1) and IEC 60079-75 (Cat. 1) and IEC 60079-76 (Cat. 1) and IEC 60079-77 (Cat. 1) and IEC 60079-78 (Cat. 1) and IEC 60079-79 (Cat. 1) and IEC 60079-80 (Cat. 1) and IEC 60079-81 (Cat. 1) and IEC 60079-82 (Cat. 1) and IEC 60079-83 (Cat. 1) and IEC 60079-84 (Cat. 1) and IEC 60079-85 (Cat. 1) and IEC 60079-86 (Cat. 1) and IEC 60079-87 (Cat. 1) and IEC 60079-88 (Cat. 1) and IEC 60079-89 (Cat. 1) and IEC 60079-90 (Cat. 1) and IEC 60079-91 (Cat. 1) and IEC 60079-92 (Cat. 1) and IEC 60079-93 (Cat. 1) and IEC 60079-94 (Cat. 1) and IEC 60079-95 (Cat. 1) and IEC 60079-96 (Cat. 1) and IEC 60079-97 (Cat. 1) and IEC 60079-98 (Cat. 1) and IEC 60079-99 (Cat. 1) and IEC 60079-100 (Cat. 1) | |
| Complies with the provisions for cables in potentially explosive atmosphere according to IEC 60079-14 (Cat. 1) and IEC 60079-17 (Cat. 1) and IEC 60079-26 (Cat. 1) and IEC 60079-27 (Cat. 1) and IEC 60079-28 (Cat. 1) and IEC 60079-29 (Cat. 1) and IEC 60079-30 (Cat. 1) and IEC 60079-31 (Cat. 1) and IEC 60079-32 (Cat. 1) and IEC 60079-33 (Cat. 1) and IEC 60079-34 (Cat. 1) and IEC 60079-35 (Cat. 1) and IEC 60079-36 (Cat. 1) and IEC 60079-37 (Cat. 1) and IEC 60079-38 (Cat. 1) and IEC 60079-39 (Cat. 1) and IEC 60079-40 (Cat. 1) and IEC 60079-41 (Cat. 1) and IEC 60079-42 (Cat. 1) and IEC 60079-43 (Cat. 1) and IEC 60079-44 (Cat. 1) and IEC 60079-45 (Cat. 1) and IEC 60079-46 (Cat. 1) and IEC 60079-47 (Cat. 1) and IEC 60079-48 (Cat. 1) and IEC 60079-49 (Cat. 1) and IEC 60079-50 (Cat. 1) and IEC 60079-51 (Cat. 1) and IEC 60079-52 (Cat. 1) and IEC 60079-53 (Cat. 1) and IEC 60079-54 (Cat. 1) and IEC 60079-55 (Cat. 1) and IEC 60079-56 (Cat. 1) and IEC 60079-57 (Cat. 1) and IEC 60079-58 (Cat. 1) and IEC 60079-59 (Cat. 1) and IEC 60079-60 (Cat. 1) and IEC 60079-61 (Cat. 1) and IEC 60079-62 (Cat. 1) and IEC 60079-63 (Cat. 1) and IEC 60079-64 (Cat. 1) and IEC 60079-65 (Cat. 1) and IEC 60079-66 (Cat. 1) and IEC 60079-67 (Cat. 1) and IEC 60079-68 (Cat. 1) and IEC 60079-69 (Cat. 1) and IEC 60079-70 (Cat. 1) and IEC 60079-71 (Cat. 1) and IEC 60079-72 (Cat. 1) and IEC 60079-73 (Cat. 1) and IEC 60079-74 (Cat. 1) and IEC 60079-75 (Cat. 1) and IEC 60079-76 (Cat. 1) and IEC 60079-77 (Cat. 1) and IEC 60079-78 (Cat. 1) and IEC 60079-79 (Cat. 1) and IEC 60079-80 (Cat. 1) and IEC 60079-81 (Cat. 1) and IEC 60079-82 (Cat. 1) and IEC 60079-83 (Cat. 1) and IEC 60079-84 (Cat. 1) and IEC 60079-85 (Cat. 1) and IEC 60079-86 (Cat. 1) and IEC 60079-87 (Cat. 1) and IEC 60079-88 (Cat. 1) and IEC 60079-89 (Cat. 1) and IEC 60079-90 (Cat. 1) and IEC 60079-91 (Cat. 1) and IEC 60079-92 (Cat. 1) and IEC 60079-93 (Cat. 1) and IEC 60079-94 (Cat. 1) and IEC 60079-95 (Cat. 1) and IEC 60079-96 (Cat. 1) and IEC 60079-97 (Cat. 1) and IEC 60079-98 (Cat. 1) and IEC 60079-99 (Cat. 1) and IEC 60079-100 (Cat. 1) | |
| Tested for -60°C to +80°C fixed installation | IEEE 802.3at PoE+, max 30 W per channel, max 95 m |
| Resistant to sunlight in accordance with UL 2556 para. 4.2.8.5 (320 h) | Resistant to sunlight with additional power channel: Square 3 x 1.5mm ² , c |

Specifications

| | |
|---------------------------|----------|
| Series | ExCam |
| Manufacturer order number | 26030405 |

SKDP03-T Kabel Kit 30 m

Your contact person

VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark
Germany

