


SKDP03-T Kabel Kit 30 m

SKU: 240913

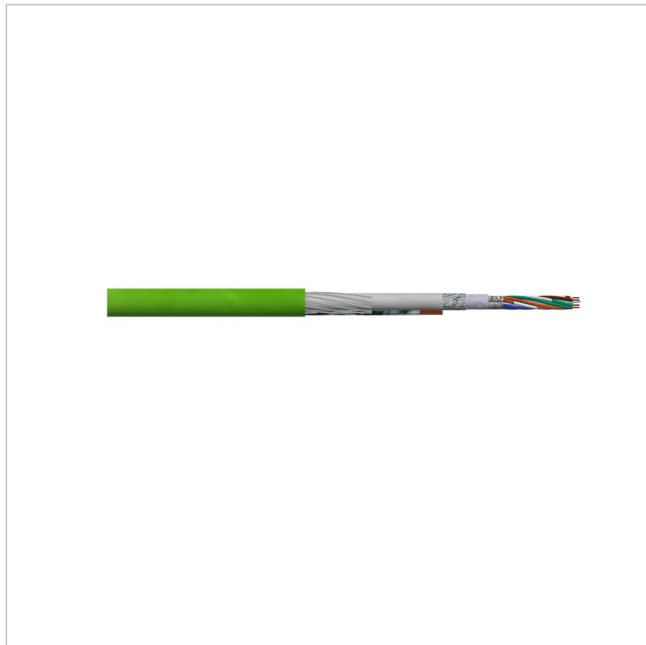

30 meter SKDP03-T system cable Digital special cable with Ex approval according to DIN EN 60079-14

Abb. ähnlich

Main Features

30 m length	Flame retardant according to IEC 60332-1-2
Meets the requirements for cables in potentially explosive atmosphere according to IEC EN 60079-14 (Cat. 1) and IEC EN 60079-15 (Cat. 2), 4h at 200°C	Oil resistant according to IEC EN 60754-1 (Cat. 1)
Complies with the provisions for cables in potentially explosive atmosphere according to IEC EN 60079-14 (Cat. 1) and IEC EN 60079-15 (Cat. 2)	Multi-resistent to corrosion with NEK 606
Tested for -60°C to +80°C fixed installation	IEEE 802.3at PoE+, max 30 W per channel, max 95 m
Resistant to sunlight in accordance with UL 2556 para. 4.2.8.5 (200h)	Designed with additional power channel: Square 3 x 1.5mm ² , c

Specifications

Series	ExCam
Manufacturer order number	26030405

SKDP03-T Kabel Kit 30 m

Your contact person

VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark
Germany

