


# SKDP03-T Kabel Kit 30 m

SKU: 240913

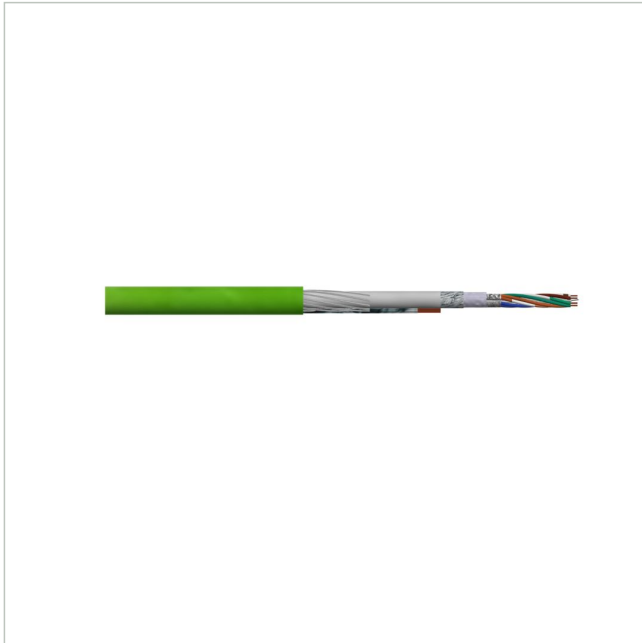

30 meter SKDP03-T system cable Digital special cable with Ex approval according to DIN EN 60079-14

Abb. ähnlich

## Main Features

30 m length	Flame retardant according to IEC 60332-1-2
Meets the requirements for cables in potentially explosive atmospheres according to IEC EN 60079-14 (Cat. 1) and IEC EN 60079-15 (Cat. 1) and IEC EN 60079-26 (Cat. 1)	Oil resistant according to IEC EN 60754-1 (Cat. 1)
Complies with the provisions for cables in potentially explosive atmospheres in accordance with IEC EN 60079-14 (Cat. 1) and IEC EN 60079-15 (Cat. 1) and IEC EN 60079-26 (Cat. 1)	Resistant to sunlight in accordance with UL 2556 para. 4.2.8 (Cat. 1)
Tested for -60°C to +80°C fixed installation	IEEE 802.3at PoE+, max 30 W per channel, max 95 m
Resistant to sunlight in accordance with UL 2556 para. 4.2.8 (Cat. 1)	Resistant to sunlight in accordance with UL 2556 para. 4.2.8 (Cat. 1) with additional power channel: Square 3 x 1.5mm <sup>2</sup> , c

## Specifications

Series	ExCam
Manufacturer order number	26030405

# SKDP03-T Kabel Kit 30 m

## Your contact person

VIDEOR E. Hartig GmbH  
Carl-Zeiss-Straße 8  
63322 Rödermark  
Germany

