


TR560X4

SKU: 74317

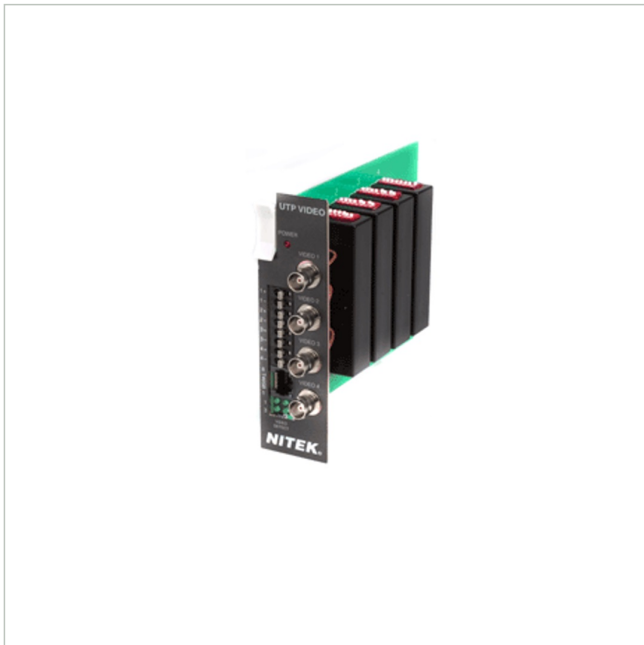

Active 4-chann. Video TP Receiver Card, BNC-RJ45, 2200m 2200m

Main Features

4-channel Video and Data (up-to-coax) Card

Bandwidth: DC to 10MHz

Unshielded CAT2 (min) Cable Required

Up-to 1000m with Passive Transmitters (UTP Cable)

500-2200m with TT560 (Active Transmitter)

Cable Length Adjustment by Dip-switches

Ground-loop and Power Surge Protection

Protection from Static and other Interferences

Video, AC, Telephone, Computer Signals via 1 Cable

LED Indication for Video Loss Control

BNC Jacks / RJ45, Terminal Block Connectors

Option: Card Cage RK400

Specifications

Model	board
Type of unit	receiver
Range	1000 m
Signal transmission	data, video
Protection rating	n/a
Operation mode	active
Manufacturer order number	TR560X4

TR560X4

Your contact person

VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark
Germany

